

XR2045

18369-000

Features

Standard Equipment

Table 2. XR2045 Standard Equipment

Description	Feature
Boom	Universal quick attach head
	Three (3) section boom
	Boom equipped with heavy-duty rollers, for longer life and less maintenance
Chassis	Rear axle stabilization
	1-1/4 inch main frame plate
	Sealed pivot pins for extended service periods
	High boom mount design
	Sliding engine/transmission cowling
	Low mounted central engine drive train
Cab	Adjustable operator controls
	Lights (front and rear)
	12 Volt electrical system
	Fuel level, engine coolant temperature, and oil pressure gauges
	Easy access drop down electrical panel
	12 Volt accessory power outlet
	Brake oil pressure, parking brake axle lock, rear wheel alignment, and declutch indicator lights
	Electric horn and backup alarm
	Declutch switch
	Rear view mirrors
	Adjustable suspension seat with seat belt
	360° panoramic visibility
Tires	Boom angle and frame level indicator
	Deluxe suspension seat
Hydraulics	Foam-filled
	Auxiliary hydraulic circuit with quick attach
	Attachment tilt switch
	Frame sway control handle
	Frame sway override switch

Optional Equipment

Table 3. XR2045 Optional Equipment

Description	Feature
Options	Hydraulic side-swing carriage (with quick attach couplers)
	Heater/defroster/windshield wiper
	Limited slip differential
	Work light package
	Various carriage sizes
	Full line of attachments
	Two-wheel rear (2WR) steering

Specifications

XR2045 Specifications

Performance



Capacity 20,000 lbs
Lift Height 45'
Forward Reach 27' 2"
Frame Leveling L/R 8°/8°
Operating Weight 44,750 lbs

Power Train



Engine Perkins 130 hp
Fuel Capacity 72 gal
Transmission 3-Speed
Brakes Inboard Wet Disc
Parking Brake SAHR

Tires



Tires (Standard Eq) Foam Filled
17.5 x 25 E3

Hydraulics



GPM 49
PSI 4,000
Hydraulic Oil Capacity . . . 58 gal

Dimensions



Length to fork face. 22' 3"
Width 102"
Height 8' 11"
Wheel Base 147"
Ground Clearance 15"
Turning Radius 15' 10"

Attachments



Standard Carriage - 72" or 96"
+ 10° Side Tilt Carriage - 48" or 72"
+ 45° Swing Carriage - 52" or 72"
Pallet Forks - 2.25" X 4" X 48"
Lumber Forks - 1.75" X 7" X 60"
Block Forks - 2" X 2" X 48"
Utility Bucket - 1 cu. yd.
Concrete Bucket - 0.5 cu. yd., or 1.00 cu. yd.
Truss Boom - 3', 12', 15'
Wallboard/Sheet Material Handler

Accessories and Options



Enclosed Cab
Limited Slip Differential
4th Steer Mode, Rear Pivot
A/C
Work Light Package
Rotating Beacon

Standard Carriage Load Capacity Chart

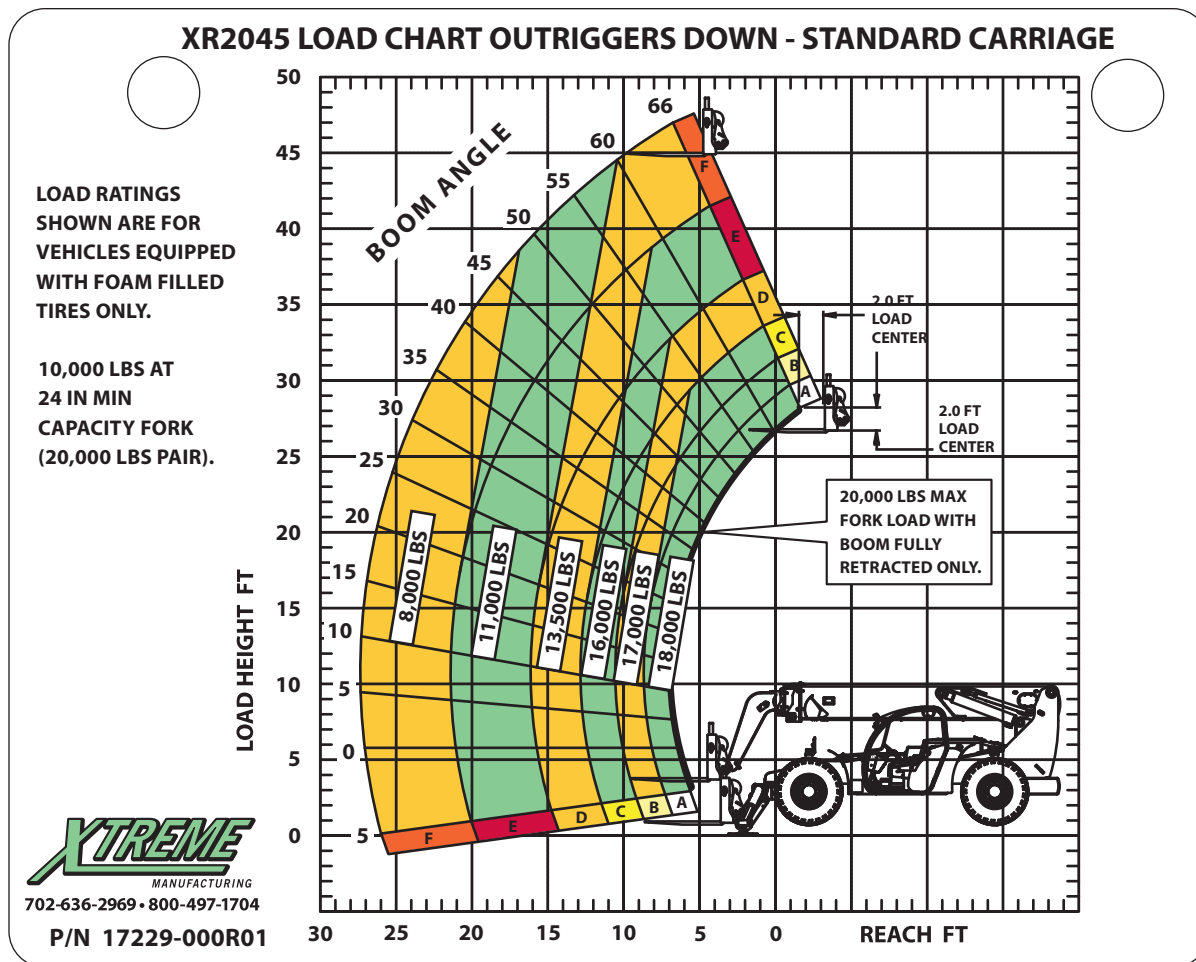


Figure 7-32. Standard Carriage Load Capacity Chart

