

**FELLING TRAILERS, INC.**


1525 Main Street South, Sauk Centre, MN 563
 Phone: 800-245-2809; FAX: 320-352-5230

Product Sheet

4500-A

www.felling.com**FT-12 XP****Drop Deck XP Series****GVWR LBS:****14,980****GAWR LBS:****13,680****WEIGHT LBS:****2,980****CAPACITY LBS:****12,000**

- 6x12# I-beam Main Frame
- 3" (80K) Jr I-beam crossmembers
- 18" on center

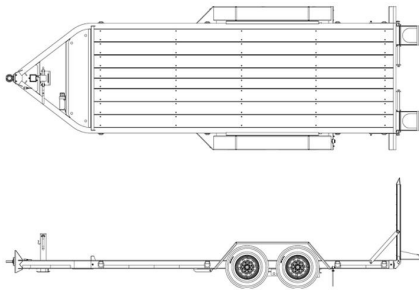

• Shown with opt. dovetail

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Main Deck Length	X	16.00	Feet
Deck Type	Pressure Treated Wood	X	1.00	Std
Ramps; Rear	5' x 16" Angle Iron Spring Assist	X	1.00	Pair
Appx Deck Height	19" Loaded, 22" Unloaded	X	1.00	Inches
Width	102" OD, 82" ID	X	1.00	Inches
Tie Downs	D-Rings, 5/8" Straight	X	8.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	7K Dexter, Drop	X	2.00	Std
Axles, Acc	Dexter EZ-Lube Hubs	X	1.00	Std
Suspension	Dexter Spring, 36" Spread	X	1.00	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] White Mod	X	4.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	5.00	Feet
Hitch Type	2 5/16" Ball Adjustable, 21,000 lb Plate Mount	X	1.00	Std
Jack	12K Drop Leg, Side Wind	X	1.00	Opt
Plug	7 Pole RV	X	1.00	Std
Lights	4 Tail Light System, LED, Sealed Wiring Harness	X	1.00	Std
Trailer Color	Black # 16847KXX	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Tool Tray	X	1.00	Std